


Depth: 220 mm

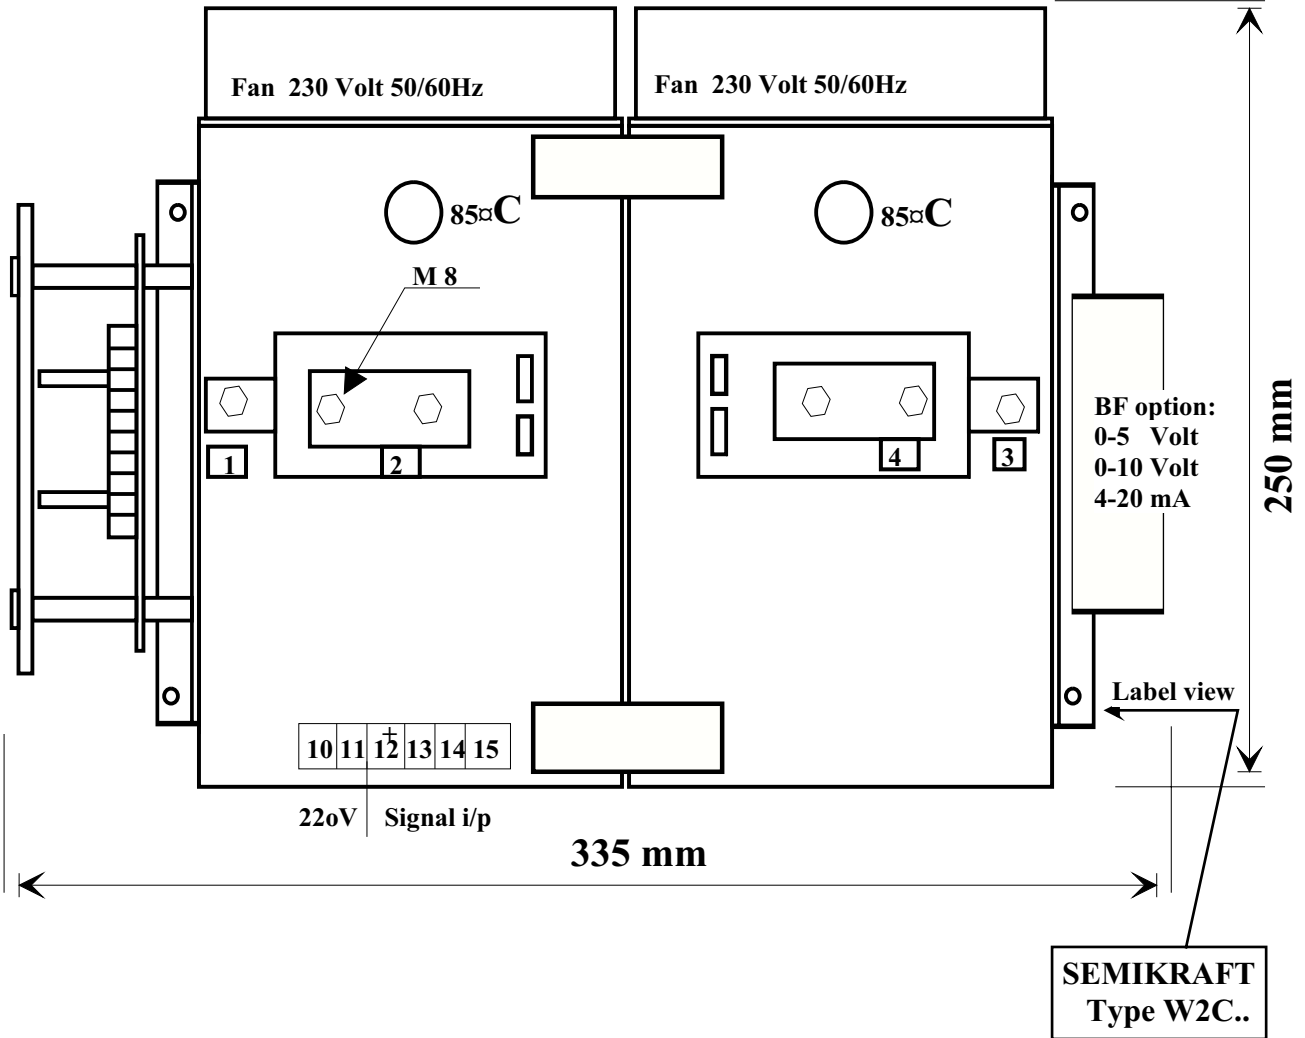

Wire instruction for CE complietnes see Wire-diagram W96-0318-1	
Rettelse;	
Vekt kg	Tap Watt
ca. 11,5 kg	400A@ 885W 300A@ 620W

<b>Målskisse</b>	
<b>W<sub>2</sub>C.....V<sub>400</sub> AF+OPT-500+BF</b>	
<b>SOLID STATE POWER</b>	
110- 500 VOLT 400 AMP	

TEGN.	H.W:
TILBUDS NR.	
ORDRE NR.	
Varenr. 14-247	
<b>W14Z50-400</b>	
SEMIKRAFT DRÖBAK	