

OPT770Z


U2 Power out

Tilkobling  
v/80A M6

v/60A M5

L1 Line inn

H=200 mm

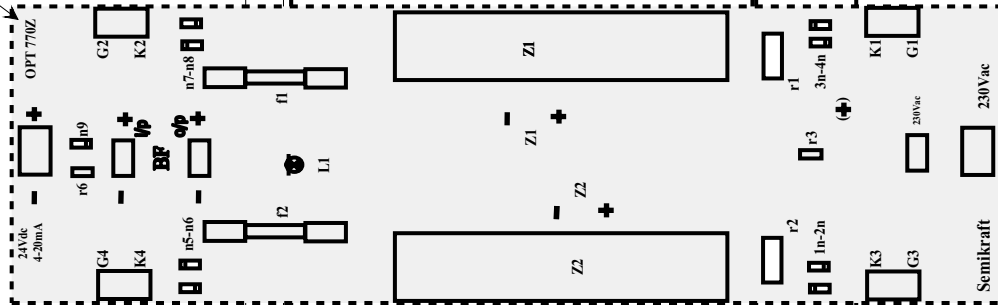

L3 Line inn

W4 Power out

W = 275 mm

Signal i/p  
Option 4-20mA,  
0-10Vdc, 24Vdc

230Vac

Depth  
215 mm

**P3/200**

0,40  $\square$ C/W v/125W  
0,36  $\square$ C/W v/ 170W

BF

140mm

Wire instruction for CE  
completnes see Wire-  
diagram W02-96020Z

Correction;

Weight kg	Total Loss Watt
ca4,3kg	125W/60A
ca4,5kg	170W/80A

*Målskisse/Outline*

*W<sub>2</sub>C 700.V.....A+OPT750+BF*

**SOLID STATE POWER**

700V 60/80AMP VARENR.14-260/14-261

TEGN. H.W:

TILBUDS NR.

ORDRE NR.

Kunde:

**W10Z70-80**

SEMIKRAFT DRÖBK