

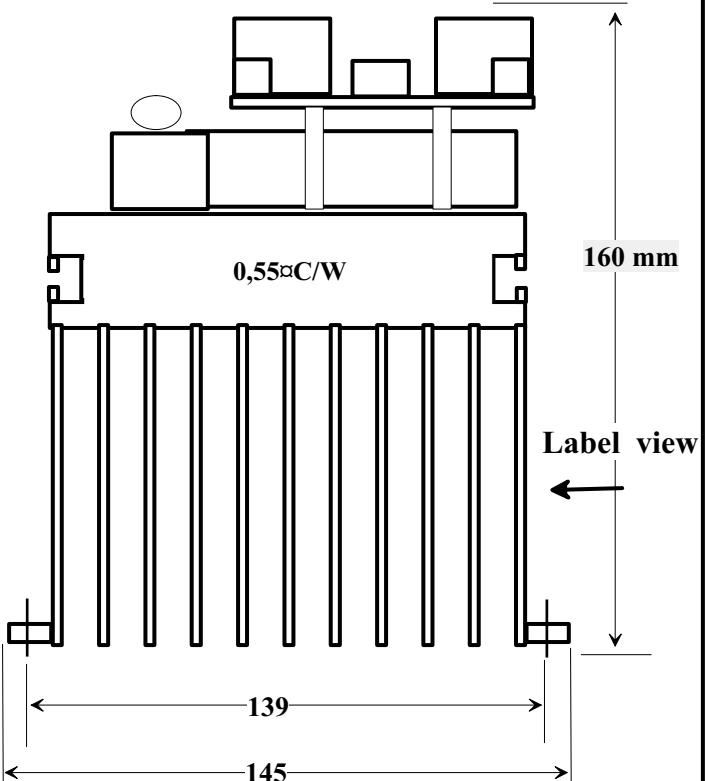


Option
4-20mA
0-10Vdc
24Vdc without BF

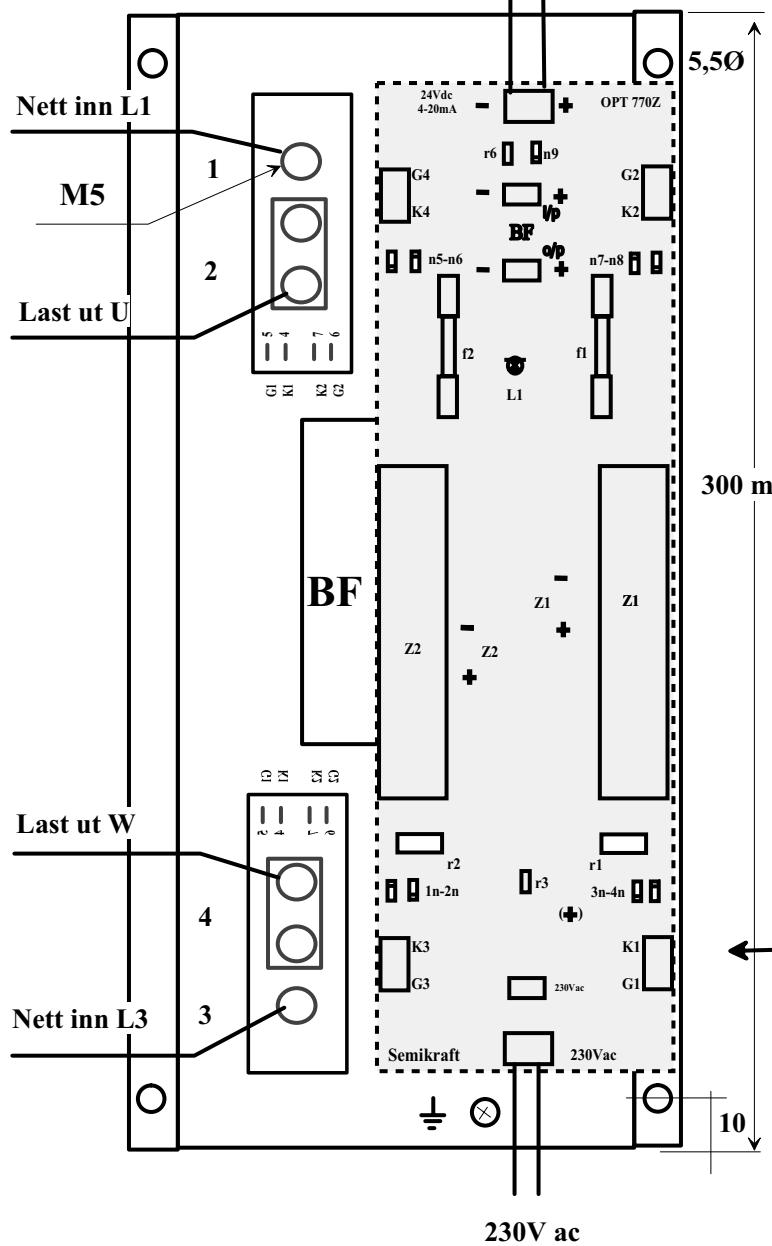

Connector for
The 3 Phase
not part of ouer
delivery.

L2

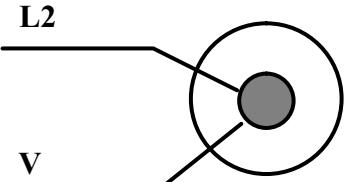

Heatsink P14/300 0,55°C/W

Wire instruction for CE
complietnes see Wire-
diagram W13-96020Z

Replace W10-96015Z
Rettelse;a)

Vekt kg	Totalt Tap Watt
3,5 kg	80W/38A

Målskisse/Outline
W2C700V38A+OPT+BF

SOLID STATE POWER

700V 38 AMP

TEGN.	H.W:
TILBUDS NR.	
ORDRE NR.	
Varenr; 14-258	
W13Z70-38	
SEMIKRAFT DROBAK	