


Connector for
The 3 Phase
not part of our
delivery.



Tilkobling
v/80A M6


U2 Power out

v/60A M5

L1 Line inn

H=200 mm.

OPT770Z

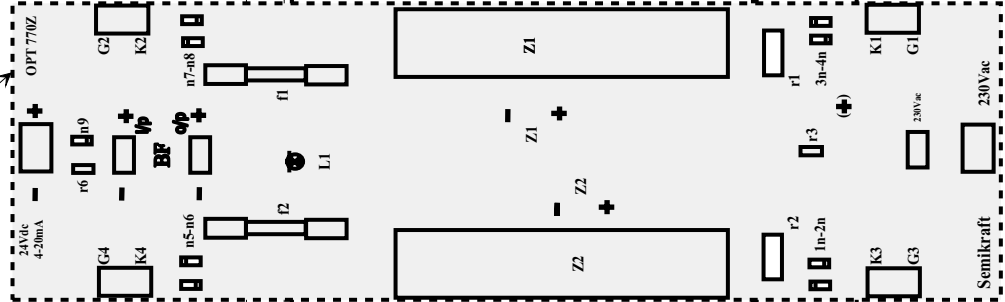

L3 Line inn

Label view

W4 Power out

W = 275 mm

Signal i/p
Option 4-20mA,
0-10Vdc,
24Vdc with out BF

230Vac

Depth
215 mm

P3/200

0,40 \square C/W v/125W
0,36 \square C/W v/ 160W

Label view

BF

Semikraft

140mm

Wire instruction for CE
completnes see Wire-
diagram W13-96020Z

Correction;

Weight kg	Total Loss Watt
ca4,3kg	125W/60A
ca4,5kg	160W/80A

Målskisse/Outline

W2C 700.V-60A-80A+OPT+BF

SOLID STATE POWER

700V 60/80AMP VAREN.R.14-260/14-261

TEGN.

H.W:

TILBUDS NR.

ORDRE NR.

Varenr; 60A/80A 14-260/261

W13Z70-60/80

SEMİKRAFT DRÖBK